

TECHNICAL REQUIREMENTS FOR SILK-PRINTING, UV PRINTING OF VISIT CARDS



GENERAL VIEW (must be shown first)

Visit card size, standard, 90x50 mm, on Touch Cover paper, black (art No. 26))




LAYOUT IS GIVEN INTO PRODUCTION UNDER THE FOLLOWING RULES:

1. Corel Draw X6 file format. Fonts must be converted to curved objects!
2. Raster images are allowed in CMYK color mode, not less than 300 dpi -- **WARN THE CLIENT ABOUT THE PRINT QUALITY, IN ADDITION, TAKE WRITTEN CONFIRMATION OF THE LAYOUT.**
3. Be sure to make a general view + layout for such items as color (CMYK), white, selective varnishing (varnish).
4. If the layout has a fill / image / object to the edge, EXTENSIONS are required under them - 5 mm (2.5 mm on each side), send the final layout in the size of 90x50 (standard) or 85x55mm (European standard), taking into account extensions beyond these frames.
5. For accurate color reproduction, first do a COLOR TEST. It is paid, the cost is indicated under the table on the site (for 1 visit card).


The layout is given to production only after written confirmation from the client, even if the layout was provided by the client.

LAYOUT BY COLORS

1. COLOR (or CMYK)

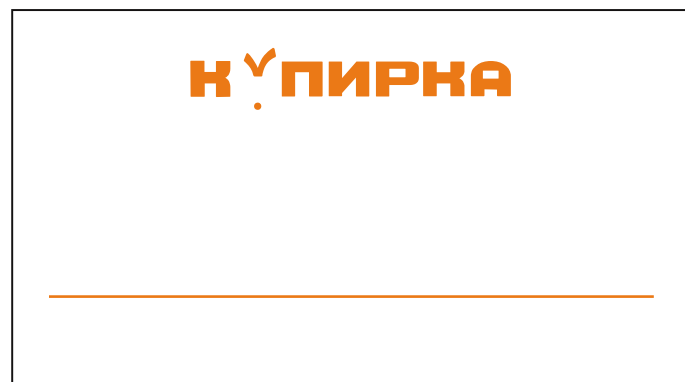

2. WHITE

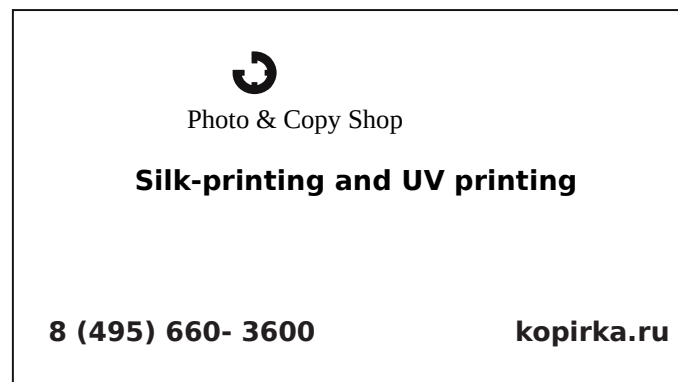

3. VARNISH

